

Video Doorbell

URDB1



Key Features



Crystal-Clear 1080P HD Video




Wi-Fi Connection



Noise-Free Two-Way talk



Adjustable Human Body Detection

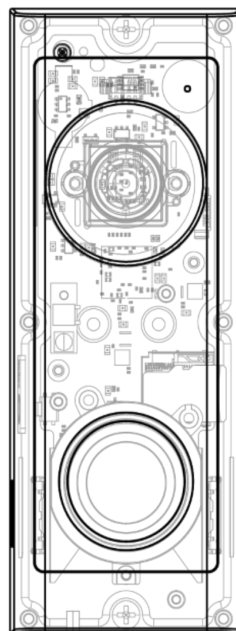

Instantaneous Alert and Answer



Infrared Night Vision



IP65 Weather-Resistant






Security System Compatible



Specifications

Camera	Sensor	2.0 megapixel, progressive scan, CMOS
	Lens	2.0mm@F2.0
	Angle of View (H)	160°
	Angle of View (V)	83°
	Minimum Illumination	Colour: 0.02Lux (F2.0, AGC ON) 0Lux with IR on
	Day/Night	IR-cut filter with auto switch (ICR)
	IR Range	Up to 5m (16ft) IR range
	WDR	DWDR
Video	Video Compression	H.265, H.264
	H.264 code profile	Baseline Profile, Main Profile
	Frame Rate	Main Stream: 1080P (1920*1080), Max 25fps; Sub Stream: 4CIF (704*576), Max 25fps
	Human Body Detection	Supported
Storage	Edge Storage	Micro SD, up to 128GB
Wi-Fi	Wireless Standards	IEEE 802.11b/g/n
	Frequency Range	2.4GHz ~ 2.4835GHz
Interface	Built-in Mic	Supported
	Built-in Speaker	Supported
	Audio Compression	G.711
	Sampling Rate	8kHz
	Indicator light	Supported
General	Power	AC 16-24V and DC 12V Power consumption: Max 5.5W
	Dimensions (L × W × H)	46.8 × 23.5 × 123.2mm (1.8" × 0.9" × 4.9")
	Weight	0.11kg (0.24lb)
	Working Environment	-30°C ~ 50°C (-22°F ~ 122°F), Humidity: ≤95% RH(non-condensing)
	Ingress Protection	IP65
	Reset Button	Supported
	Call Button	Supported

Dimensions

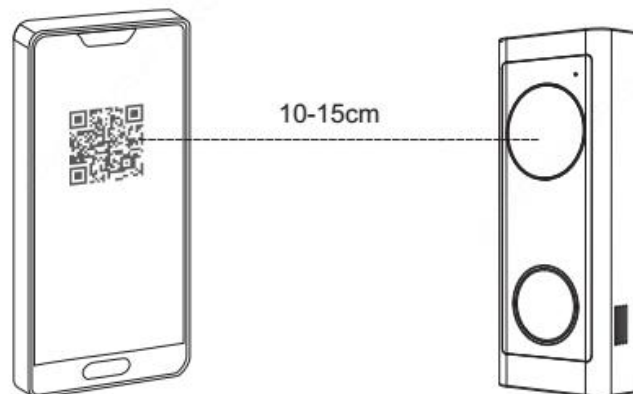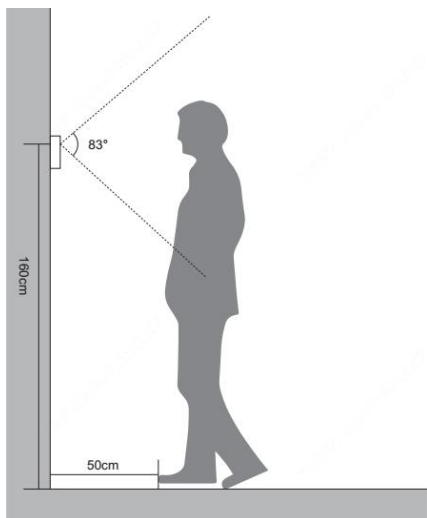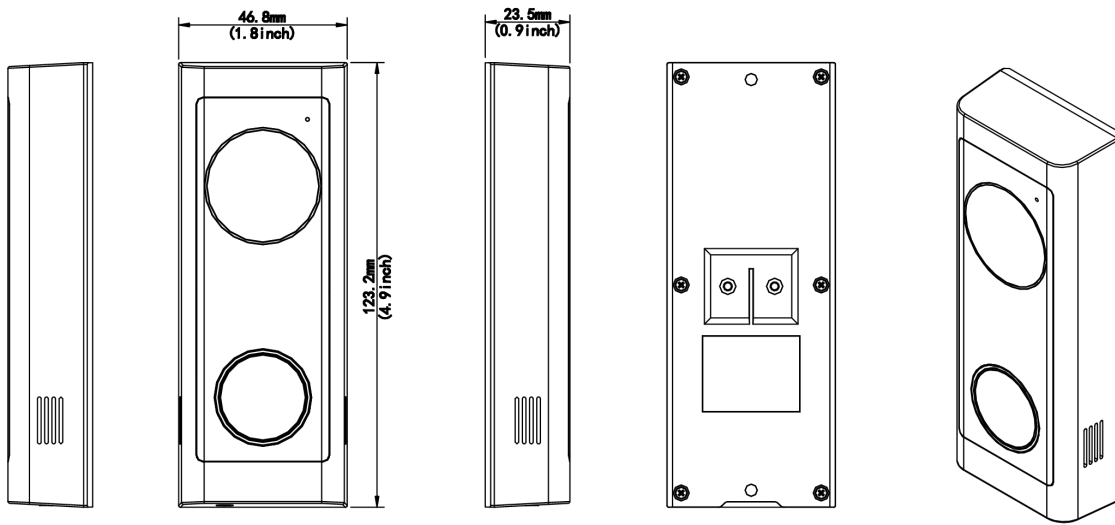

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China (310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2019 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.